




►►►► **Features**

- Built-in LED status indicators for each input and output points.
- Watch-dog feature for halting operation of unknown causes and reverting to normal operation condition after problem solved.
- Compact size, easy to install.
- RS-485 communication interface and the maximum distance to the controller is 1 KM.
- Capability of connecting external backup power supply for emergency.



... ↪ **MDDIDO - 15**

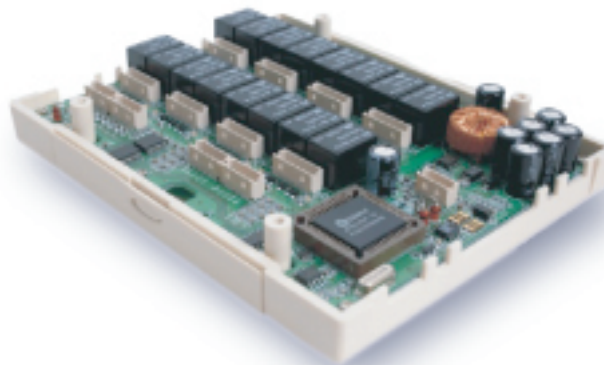

... ↪ **MDDIDO - 16**

SPECIFICATIONS

Items / Specs	MDDIDO-15	MDDIDO-16
Output points	2 relay	16 relay
Input points	4 voltage free input	16 voltage free input
Dimensions(mm)	75Wx115Hx15D	107W x 138H x 30D
Interface	RS485 format	
Baud rate*	19,200 bps (4,800 bps -115,200 bps)	
ID	1to8or01to99	
Indicator	3 LED	
Power supply	8V to15VDC	
Operating TEMP.	-20°C to 70°C	
Storage TEMP.	30°C to 80°C	

**This specification is preliminary and subject to change without prior notice*